

## GES-5400

This extreme-volume 2-flavor soft serve freezer is perfect for serving lots of product in a short amount of time! Features the GES-5400 Genesis Series™ with the Virtual Quality Management System™ to streamline your business. Includes a front-loading refrigerated cabinet with a high speed pump. Our pressurized machines consistently produce smooth and creamy high and low fat products like ice cream, custard, yogurt and sorbets. Excellent for full-menu ice cream and custard stores, sports arenas & stadiums.



**Multi-function LED Display**  
with manager smart tools.

**Virtual Quality Management System™**  
monitors Temperature and Consistency to provide superior taste and quality.

### Pump Forward Design

New pump forward design reduces maintenance and cleaning time.



### Optional Sliding Tray Mix Storage

Mix tray slides out with mix containers in place which makes adding mix quicker and easier.




**Self Closing Spigots**  
prevents the mess and eliminates waste.

**Optional Door Latch**

**Scroll Compressor Technology**  
provides increased capacity, reliability and efficiency.

**GES-5400 Soft Serve Freezer**

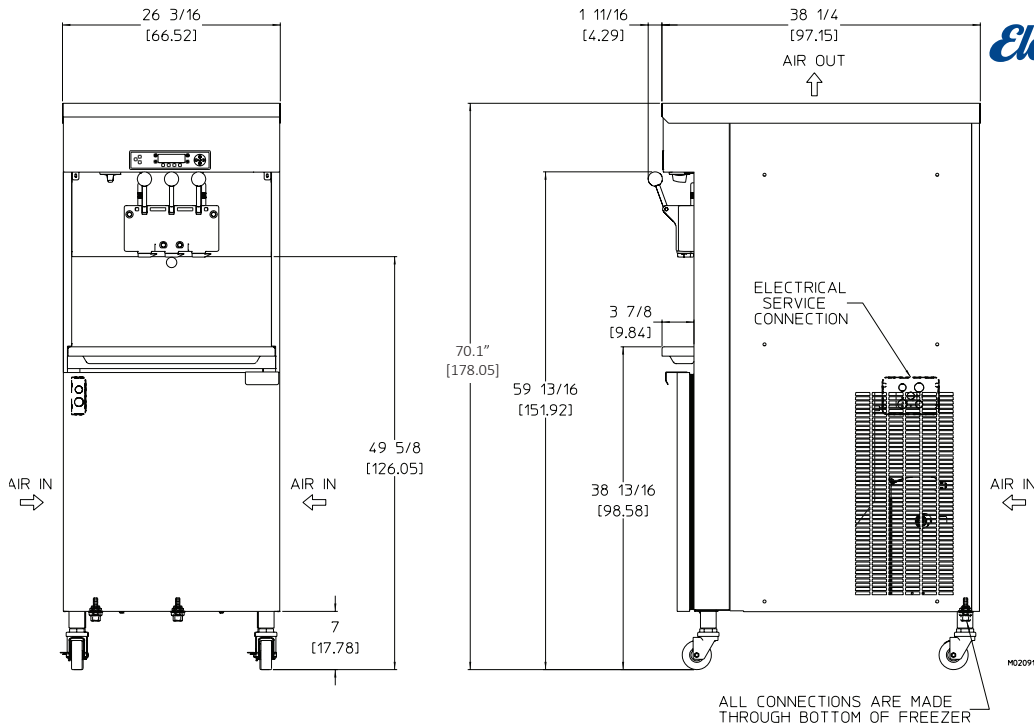

**MODEL GES-5400 SPECIFICATIONS**

Due to continual product improvements all specifications are subject to change without notice.

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>	
Net	914	414	
Crated	995	460	
	<b>cu.ft.</b>	<b>cu.m.</b>	
Volume	58.42	1.65	
<b>Dimensions</b>	<b>in.</b>	<b>cm</b>	
Width	26-3/16	66.52	
Depth	38-1/4	97.15	
Height	70.1	178.05	
<b>Electrical</b>	<b>Maximum Fuse Size</b>	<b>Minimum Ampacity (Qty)</b>	<b>NEMA Plug Type</b>
208-230/60/1 Air	35 (2)	29 (2)	2P, 2W
208-230/60/1 Water	35 (2)	27.5 (2)	2P, 2W
208-230/60/3 Air	25 (2)	20 (2)	3P, 3W
208-230/60/3 Water	25 (2)	19 (2)	3P, 3W

Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.

**Bidding Spec**

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ Ph \_\_\_\_\_

Cooling: \_\_\_\_\_ Neutral \_\_\_\_\_ Yes \_\_\_\_\_ No

Options: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Electrical**

A dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

**Beater Motor**

Two, 2hp.

**Refrigeration Systems**

Two, 19,000 Btuh. R404a.  
Separate Cabinet Refrigeration, One, 1200 Btuh, R134a.  
Btuh may vary depending on compressor used.

**Air Cooled**

For proper air circulation, unit requires 6" (15.2 cm) air space at rear panel or 6" side clearance with 1" back and 29" top clearance.

**Mix Capacity:** 2 tanks - 24 quarts (22.7 liters) ea.

**Freezing Cylinder Capacity:** two - 5 quarts (4.7 liters) each

Certified and/or listed by:



\*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-13



**Electro Freeze div. of H.C. Duke & Son, LLC**

2116-8th Avenue, East Moline, Illinois 61244 USA  
Phone (309) 755-4553 • (800) 755-4545  
FAX (309) 755-9858  
E-mail: sales@electrofreeze.com

**Authorized Distributor**